
IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL.
It is an example only, prepared to support the offer that Orad must make to the end client.

ADVANTECNIA ACE BG · Orad	Made by:	ACE BG · Advantecnia
	Revised by:	Technical dept. · 26/10/2026
	Reference:	ORAD-YOS-EX2-2026-10_esq_REV00 · sheet 1/6



Bus 2 x 2 x 0,8 mm · RS485 + 12-48 VDC · daisy chain SmartHub A → #1 ... #24 (corridor ceiling)

Equipment (quantities of the whole example)

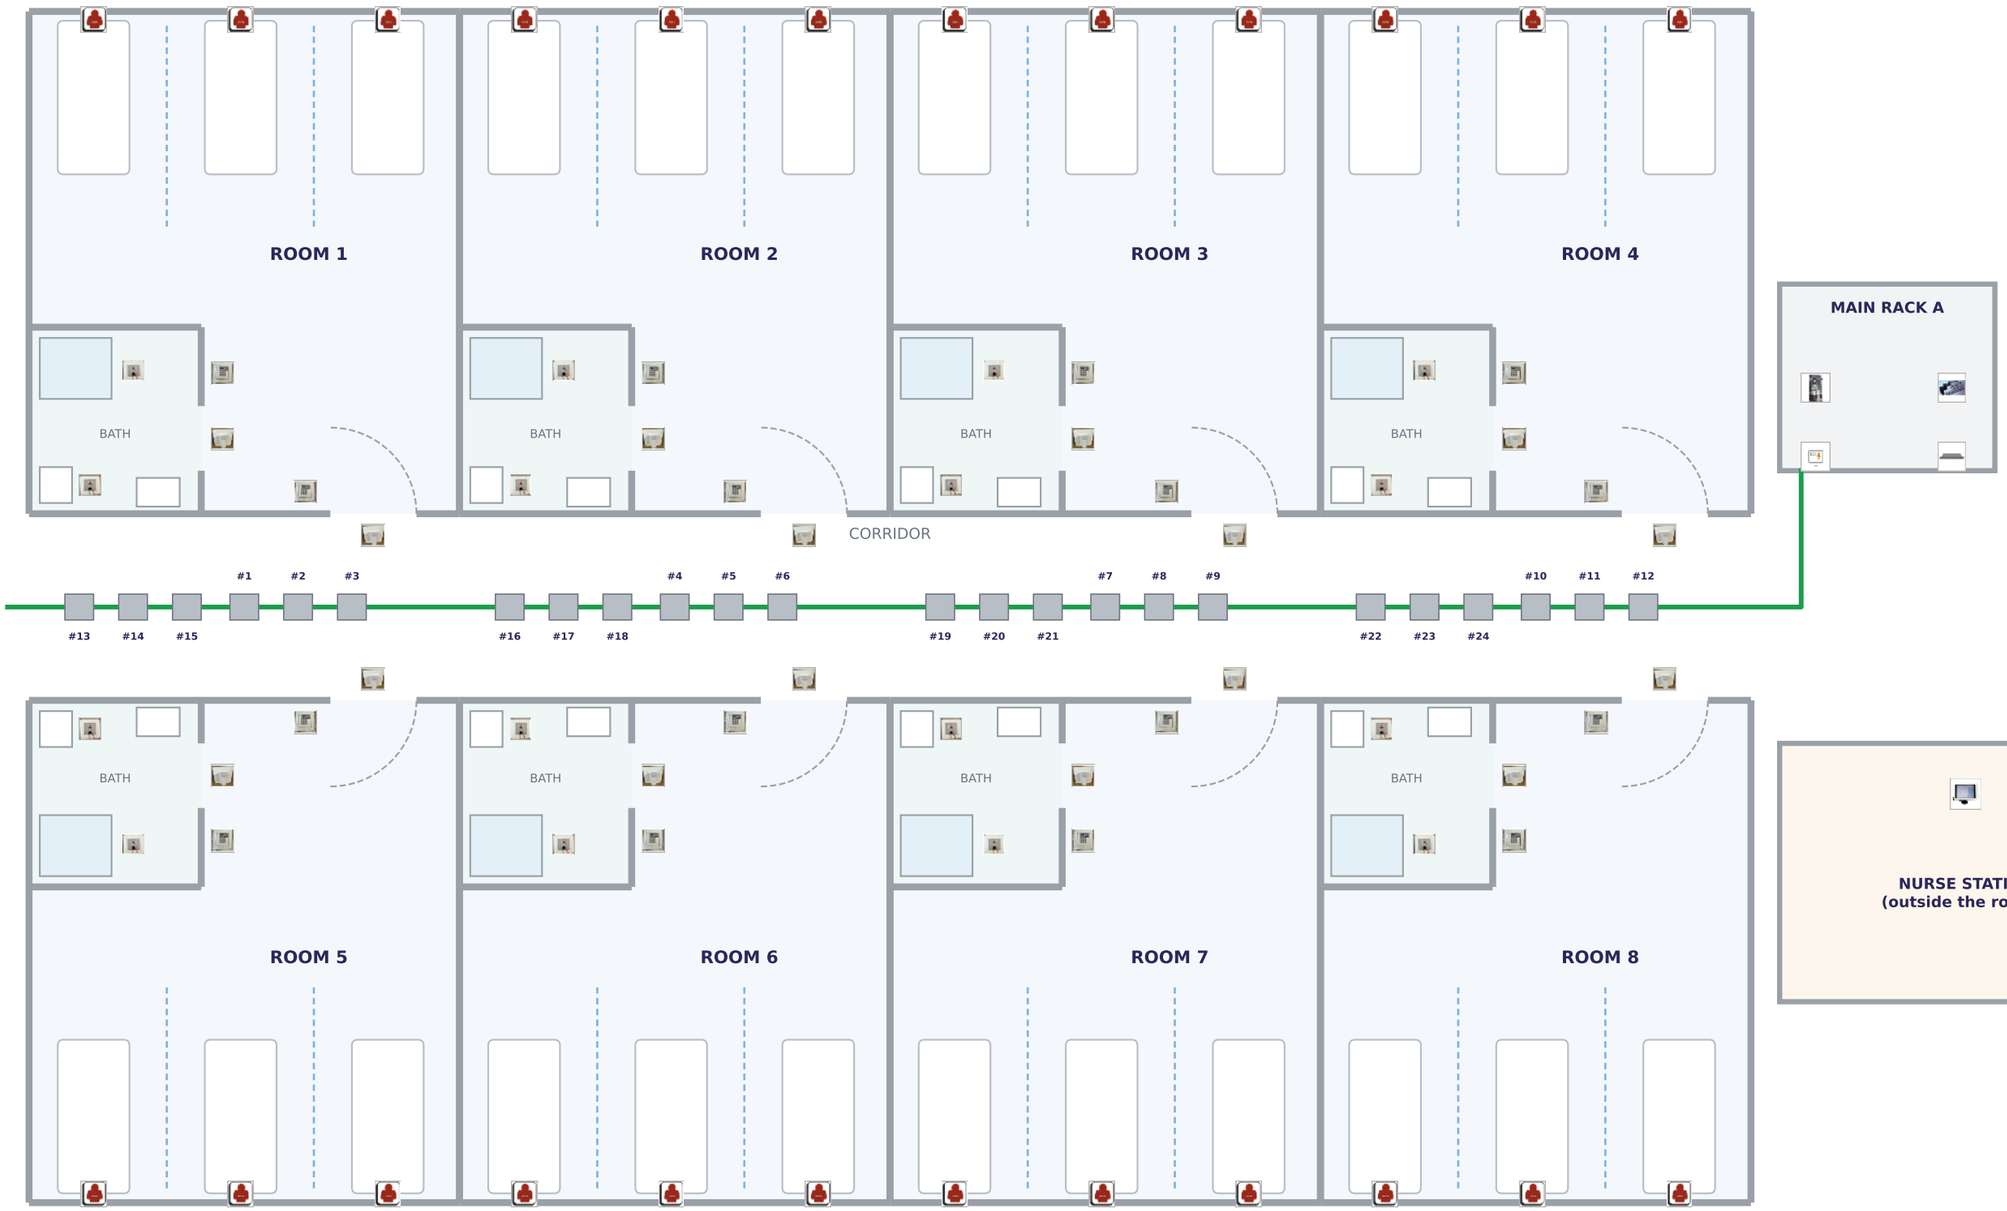

39 × ECV169
Room controller PCB 24 pins, 12–48 V DC



39 × ACE82012153
Bed call panel, red, with bayonet socket for pear handset



26 × ACE82082137
Presence / cancel panel, green



26 × EOP004
Corridor light, 3 colours (red · green · blue)



26 × ACE40320303
SOS mechanism with pull-cord (toilet / shower)



2 × EVV049
SmartHub connectia – head of the controller bus




1 × EOP006
LVNS server – local server & notifications



2 × EOP002
Nurse station iPad 10.9" Wi-Fi 128 GB

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL.
It is an example only, prepared to support the offer that Orad must make to the end client.

ADVANTECNIA ACE BG · Orad	Made by:	ACE BG · Advantecnia
	Revised by:	Technical dept. · 26/10/2026
	Reference:	ORAD-YOS-EX2-2026-10_esq_REV00 · sheet 2/6

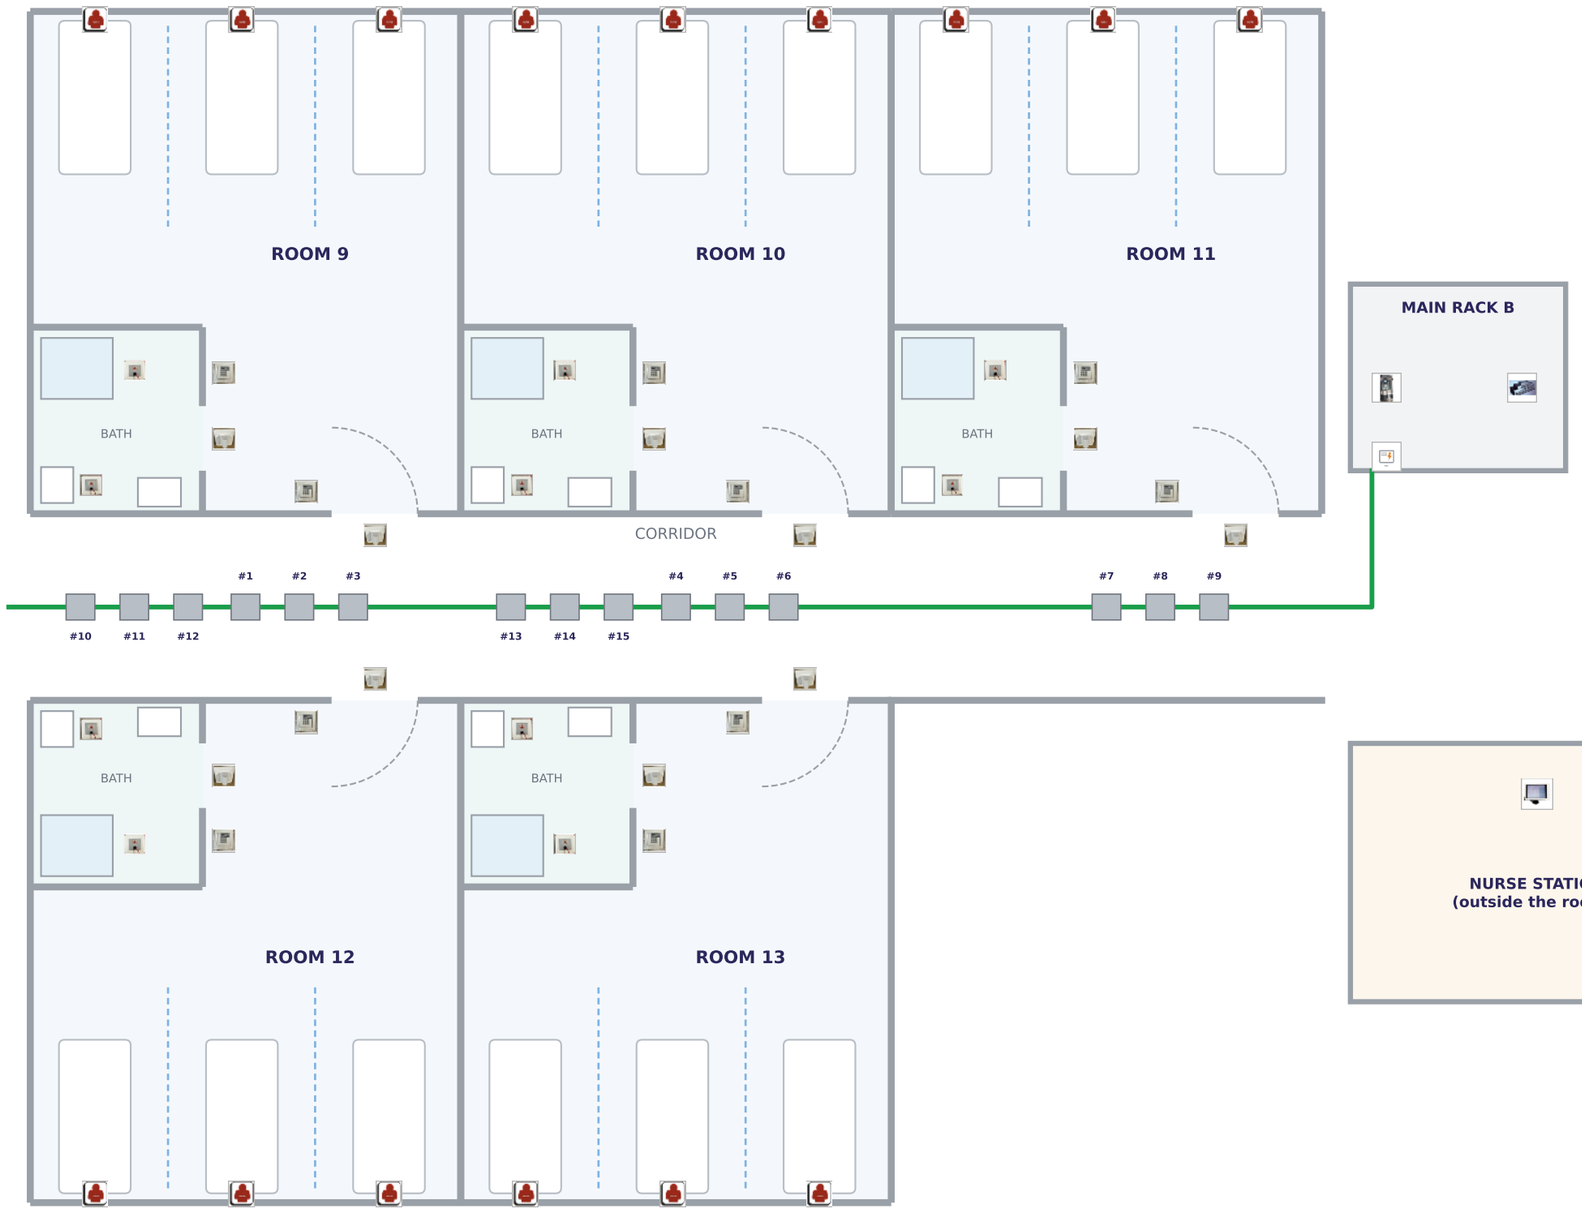

Bus 2 x 2 x 0,8 mm · RS485 + 12-48 VDC · daisy chain SmartHub B → #1 ... #15 (corridor ceiling)

Equipment (quantities of the whole example)



39 × ECV169
Room controller PCB 24 pins, 12–48 V DC



39 × ACE82012153
Bed call panel, red, with bayonet socket for pear handset



26 × ACE82082137
Presence / cancel panel, green



26 × EOP004
Corridor light, 3 colours (red · green · blue)



26 × ACE40320303
SOS mechanism with pull-cord (toilet / shower)



2 × EVV049
SmartHub connectia – head of the controller bus



1 × EOP006
LVNS server – local server & notifications



2 × EOP002
Nurse station iPad 10.9" Wi-Fi 128 GB

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL.
It is an example only, prepared to support the offer that Orad must make to the end client.

ADVANTECNIA ACE BG · Orad	Made by:	ACE BG · Advantecnia
	Revised by:	Technical dept. · 26/10/2026
	Reference:	ORAD-YOS-EX2-2026-10_esq_REV00 · sheet 3/6

MAIN RACK A



SmartHub connectia · EVV049

2 x 2 x 0,8 mm

>>> To Room PCB #1 (section A)



PoE switch · ACESWP24P



UPS · rack (local supply)

RJ45 · LAN PoE · UTP Cat6a · RJ45



LVNS server · EOP006 · SHARED

Bus daisy chain · 24 × PCB ECV169 (corridor ceiling)

#1 — #2 — #3 — #4 — #5 — #6 — #7 — #8 — … #24

2 x 2 x 0,8 mm · RS485 + 12-48 VDC

<< Nurse iPad A (Wi-Fi) · Wi-Fi AP via PoE switch

LAN / fibre link between racks → shared LVNS server in rack A

MAIN RACK B



SmartHub connectia · EVV049

2 x 2 x 0,8 mm

>>> To Room PCB #1 (section B)



PoE switch · ACESWP24P



UPS · rack (local supply)

RJ45 · LAN PoE · UTP Cat6a · RJ45

Bus daisy chain · 15 × PCB ECV169 (corridor ceiling)

#1 — #2 — #3 — #4 — #5 — #6 — #7 — #8 — … #15

2 x 2 x 0,8 mm · RS485 + 12-48 VDC

<< Nurse iPad B (Wi-Fi) · Wi-Fi AP via PoE switch

Equipment on this sheet



2 × EVV049
SmartHub connectia – 1 per section



1 × EOP006
LVNS server – 1 for the system



2 × EVV038
ionTab licences + MDM



2 × ACESWP24P
PoE switch 24 ports



2 × RACK9U
Wall rack 19" 9U (local supply)




2 × UPS1500
UPS 1500 VA (local supply)

Mounting / wiring notes

- Rack in a technical room or at the corridor end.
- 230 V dedicated circuit to each rack (electrician).
- SmartHub supplies 12-48 VDC to the PCB bus.
- Max. PCBs per bus: to be confirmed by ACE BG.

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL.
It is an example only, prepared to support the offer that Orad must make to the end client.

ADVANTECNIA **ACE BG · Orad**	Made by:	ACE BG · Advantecnia
	Revised by:	Technical dept. · 26/10/2026
	Reference:	ORAD-YOS-EX2-2026-10_esq_REV00 · sheet 4/6

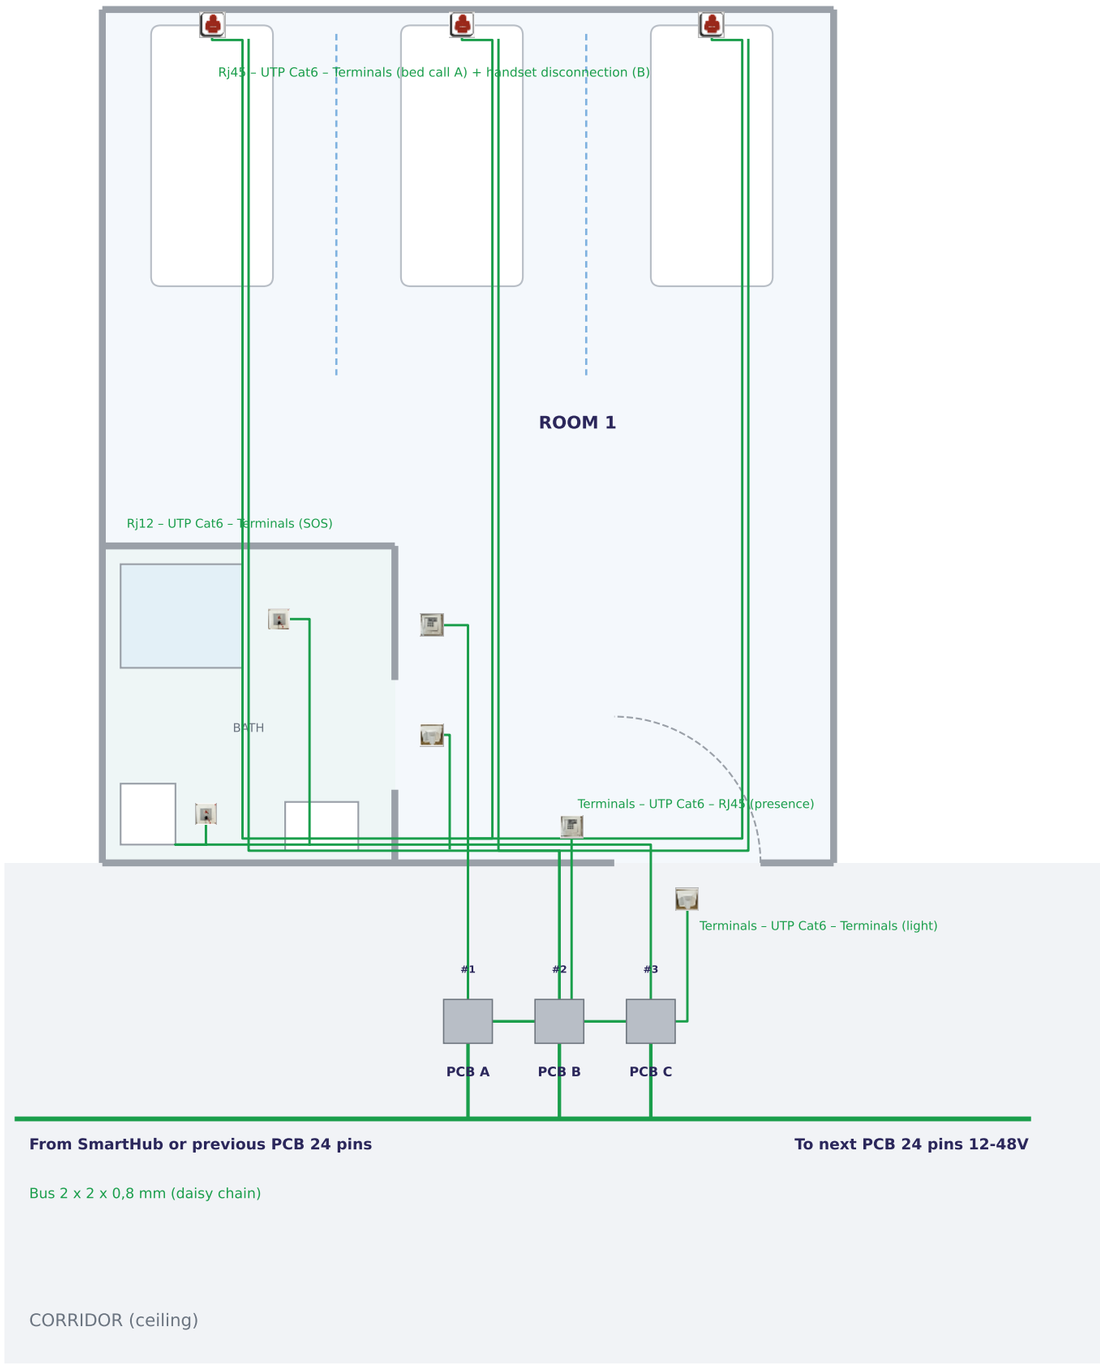

Equipment on this sheet



3 × ACE82012153
Bed call panel + bayonet · h 1,15 m



3 × ACE39060521
1-button handset 2 m · bayonet



2 × ACE82082137
Presence / cancel · room door + outside bath



2 × EOP004
3-colour light · above room and bath doors



2 × ACE40320303
SOS pull-cord · WC + shower · h 1,85 m



3 × ECV169
PCB 24 pins · corridor ceiling

Mounting / wiring notes

- Radial wiring: each device has its own UTP Cat6
- cable to its PCB in the corridor ceiling.
- PCB A: 3 bed calls + presence + room light.
- PCB B: 3 handset disconnection alarms.
- PCB C: 2 SOS + presence outside bath + bath light.
- Bus 2x2x0,8 mm: in → PCB → out (daisy chain).
- Heights from finished floor; confirm on site.

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL.
It is an example only, prepared to support the offer that Orad must make to the end client.

ADVANTECNIA **ACE BG · Orad**	Made by:	ACE BG · Advantecnia
	Revised by:	Technical dept. · 26/10/2026
	Reference:	ORAD-YOS-EX2-2026-10_esq_REV00 · sheet 5/6

Equipment on this sheet



2 × EOP002
Nurse iPad · Wi-Fi



2 × EVV038
ionTab licences + MDM



2 × WAP6
Wi-Fi AP (local supply)

Mounting / wiring notes

- Shabbat system: certified for use on Shabbat (ZOMET).
- Shabbat system: nurse desk = iPad.
- Wi-Fi: hospital network or the AP of this offer.



((·))
Wi-Fi

Nurse iPad 10.9" · EOP002 · nurse station A



((·))
Wi-Fi

Nurse iPad 10.9" · EOP002 · nurse station B

Receives and resolves all calls (Consola Monitor) · sets / cancels presence in any room · outside the patient rooms

Equipment (whole example)



39 × ACE82012153
Bed call panel, red, with bayonet socket for pear handset



39 × ACE39060521
Pear handset, 1 capacitive button, 2 m cable, bayonet



26 × ACE82082137
Presence / cancel panel, green



26 × ACE40320303
SOS mechanism with pull-cord (toilet / shower)



26 × EOP004
Corridor light, 3 colours (red · green · blue)



39 × ECV169
Room controller PCB 24 pins, 12–48 V DC



2 × EVV049
SmartHub connectia – head of the controller bus



1 × EOP006
LVNS server – local server & notifications



2 × EOP002
Nurse station iPad 10.9" Wi-Fi 128 GB



2 × EVV038
ionTab client/server licences + MDM (1st year included)



2 × ACESWP24P
PoE switch 24 ports, managed



2 × RACK9U
Wall rack 19" 9U with PDU, shelf and cable management — local supply – estimate



2 × UPS1500
UPS 1500 VA online, rack mount — local supply – estimate



2 × WAP6
Wi-Fi 6 access point, PoE, at the nurse station — local supply – estimate

Cables and containment (estimates – see BOQ)

100 m · CB-BUS
Bus cable 2×2×0.8 mm (RS485 + 12–48 V) – PCB daisy chain

1550 m · CB-UTP6
UTP Cat6 cable – device drops to the PCBs

39 pcs · CB-JB
Junction box for room controller (PCB) in ceiling

117 pcs · CB-BB
Flush back box for wall devices

59 m · CB-TRAY
Cable tray / conduit in corridor ceiling

2 lot · CB-PWR
230 V dedicated circuit to each rack

1 lot · CB-LAN
LAN link between section racks (fibre or Cat6, length TBC)

Notes

- Radial wiring inside each room: every device to its PCB 24 pins (ECV169) in the corridor ceiling.
- PCBs daisy-chained with bus cable 2x2x0,8 mm (RS485 + 12-48 VDC) from the SmartHub of each section.
- Bathroom: SOS pull-cord beside the WC and beside the shower (h 1,85 m), presence / cancel outside, light above the door.
- Nurse station outside the rooms: iPad by Wi-Fi.
- Not included: cabling, conduits, junction boxes, installation and start-up (local subcontractor).
- Example only – confirm quantities, routes and maximum PCBs per bus before a real proposal.