
IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL. It is an example only, prepared to support the offer that Orad must make to the end client.

Ward section A · floor plan · 8 rooms × 3 beds

ADVANTECNIA ACE BG · Orad		
	Project	Yoseftal Medical Center, Eilat
	Document	Example Proposal 1 · plans
	Ref.	ORAD-YOS-EX1-2026-10
	Date · sheet	26/10/2026 · 1/3

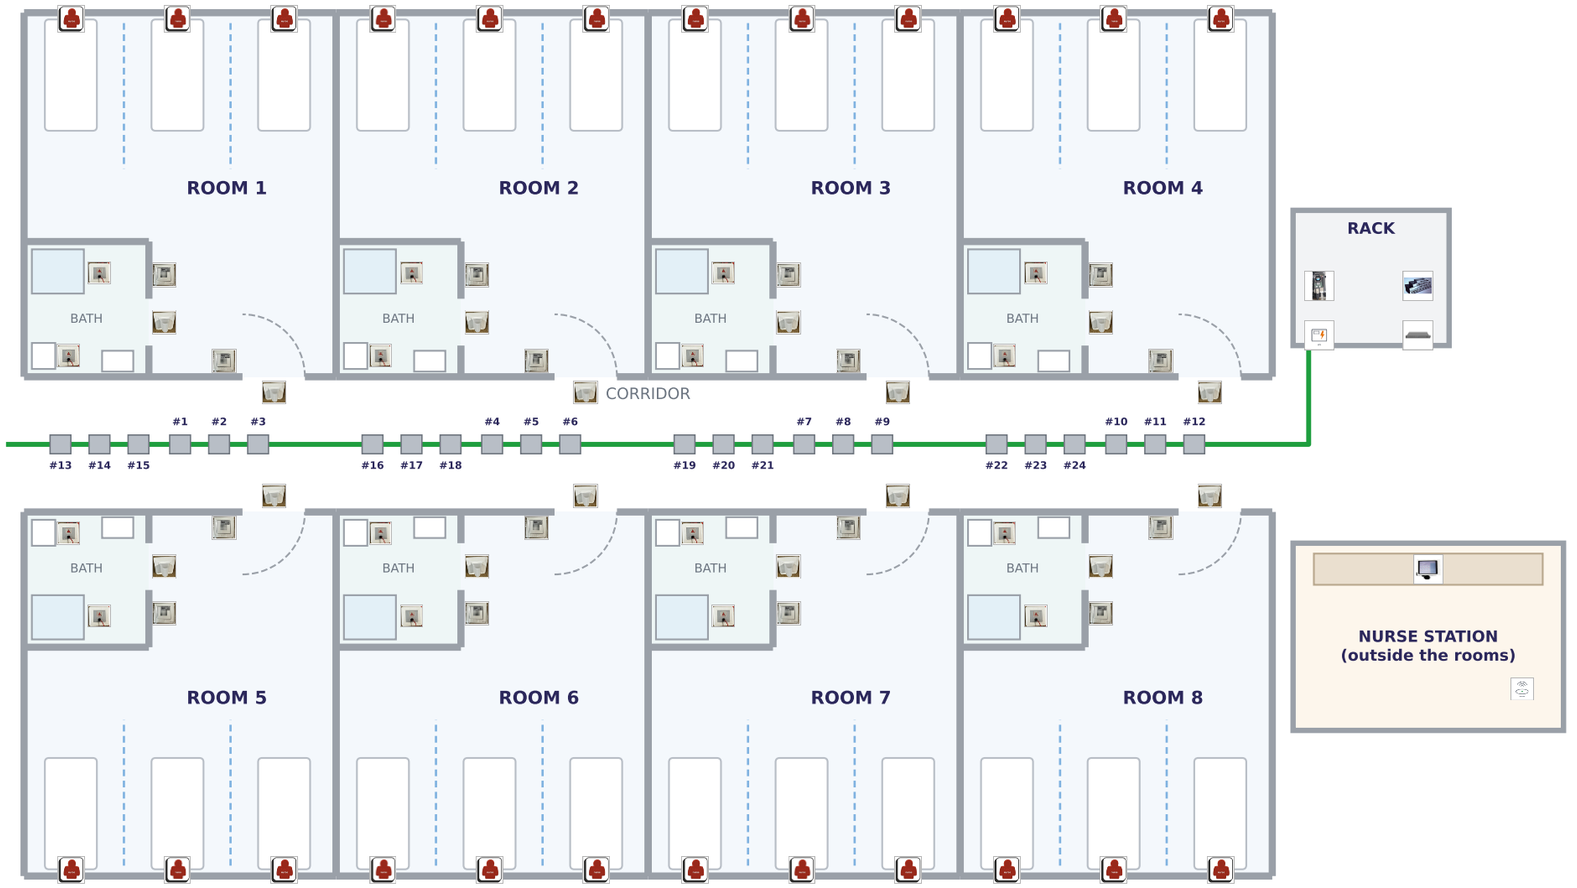

Bus 2×2×0.8 mm · RS485 + 12–48 V DC · daisy chain SmartHub A → #1 … #24 (corridor ceiling)

Quantities = whole project



24 × ACE82012153
Bed call panel, red, with bayonet socket for…



24 × ACE39060521
Pear handset, 1 capacitive button, 2 m cable…



16 × ACE82082137
Presence / cancel panel, green



16 × ACE40320303
SOS mechanism with pull-cord (toilet / showe…



16 × EOP004
Corridor light, 3 colours (red · green · blu…



24 × ECV169
Room controller PCB 24 pins, 12–48 V DC




1 × EVV049
SmartHub connectia – head of the controller …



1 × EOP002
Nurse station iPad 10.9" Wi-Fi 128 GB

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL. It is an example only, prepared to support the offer that Orad must make to the end client.

Typical room (3 beds) + en-suite bathroom · devices and heights

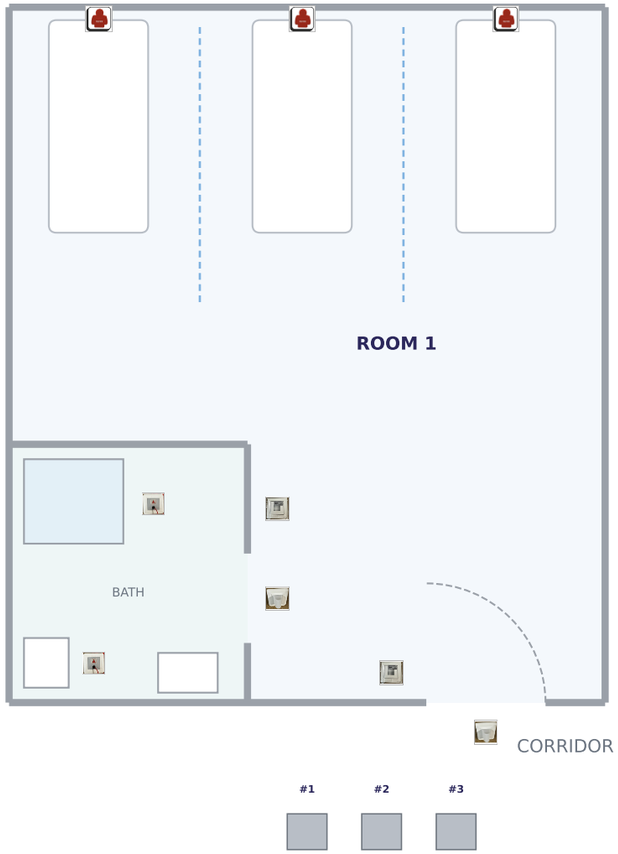



ACE82012153

Bed call panel + bayonet – 1 per bed – h 1.15 m



ACE39060521

Pear handset 2 m – 1 per bed (plugs into the panel)



ACE82082137

Presence / cancel – room door (inside) + outside bathroom – h 1.35 m



EOP004

Corridor light – above room door + above bathroom door – h 2.42 m



ACE40320303

SOS pull-cord – beside toilet + beside shower – h 1.85 m



ECV169


3 PCB per unit in corridor ceiling: A = 3 beds + presence + light · B = 3 handset alarms · C = bathroom

Same unit is repeated in every room. Mounting heights are typical values – to be confirmed on site.

IMPORTANT – THIS IS NOT A REAL, FORMAL OR OFFICIAL PROPOSAL. It is an example only, prepared to support the offer that Orad must make to the end client.

System architecture · AdvantCare nurse call (ionIDe / Advantecnia)

ADVANTECNIA ACE BG · Orad		
	Project	Yoseftal Medical Center, Eilat
	Document	Example Proposal 1 · plans
	Ref.	ORAD-YOS-EX1-2026-10
	Date · sheet	26/10/2026 · 3/3

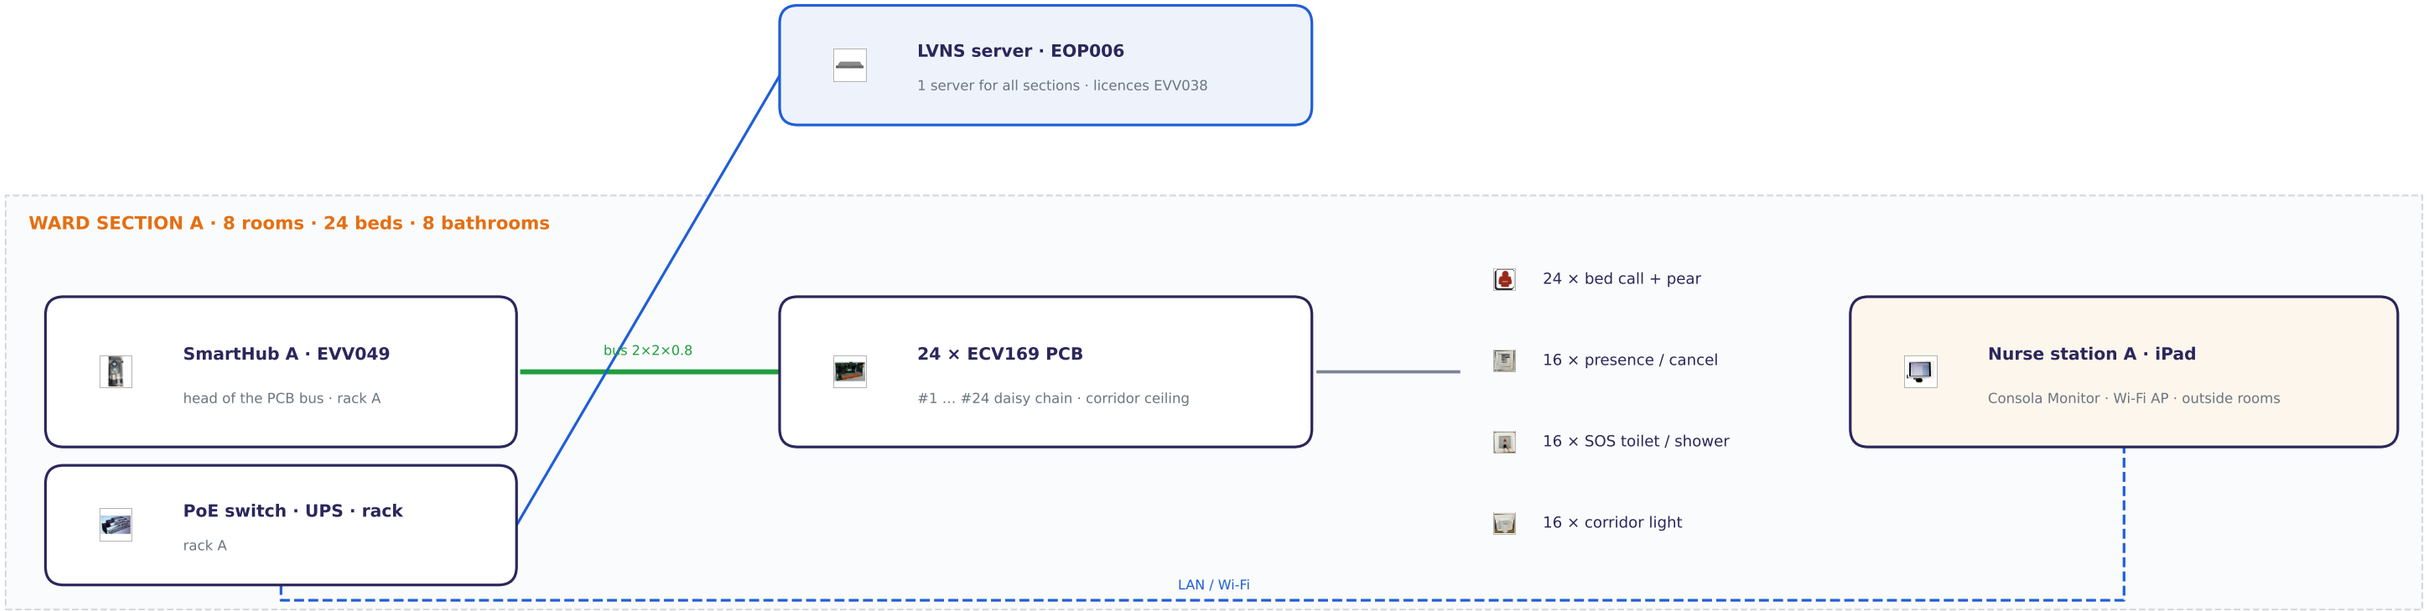

Not drawn: cabling, conduits, junction boxes and installation (local subcontractor). Hospital LAN / Wi-Fi can replace the AP.